woodworkers **pivot + slider hardware**


light weight sliding hardware - 60kg

Brio

☐ 7009
sold in 2 and 3m lengths
BRIO SINGLE RUN 60 PACK TOP HUNG SLIDING DOORS
- max height : 2400mm
- max width - 1500mm
- max weight : 60kg/door
- min door thickness - 24mm
- internal use only

suitable for a single door or for two doors on a bi-parting install
doors may slide in one or both directions
single door kit comprises
- 2 hangers • 2 door stops
- 1 guide • spanner + screws

2m or 3m track lengths available


60 profile top track
31(w) x 30mm(h)


door stops



spanner



saw cut guide


hanger

NOT PART OF THE KIT


7026 soft close


7019 pelmet


☐ 7007 bracket

pivots + closers


☐ 7901S
slimline parallel arm door closer

☐ 7904S
head reinforcing option for transom mounted hydraulic closer





■ 7905B
narrow pivot arm option for 40mm doors


7903
pivot door hydraulic transom closer

☐ 7908S
non hydraulic pivot bottom assembly


also requires 7907S


7909
concealed spring action door closer 150mm


☐ 7907S
non hydraulic pivot top assembly


7906
floor mounted pivot closer with cover plate and bottom arm

also requires 7907S

DORMA

surface mount top hung sliding hardware - 120kg

☐ 7040
sold in 2 and 3m lengths
For internal use only
Panels can slide to one or both sides
BRIO QUICK RUN 120
- max height - 3000mm
- max panel width - 75% of height
- max weight - 120kg
- **door thickness - min 28mm**
- **clearance: 25mm ± 5mm**

single door kit comprises
- top track 120F
- 2 x hangers
- 2 x clip stops
- 1 x nylon saw cut guide


120 profile top track
41(w) x 30mm(h)


clip stop


hanger


saw cut guide

NOT PART OF THE KIT


☐ 7012 aluminium sleeve for poly track
25(w) x 23mm(h)


■ 7013 poly track
21(w) x 20mm(h)


☐ 7022 bearing guide


☐ 7025 adjustable architrave guide


☐ 7007 bracket


7027 soft close

zero clearance top hung sliding hardware - 120kg


☐ 7041
sold in 2 and 3m lengths
For internal use only
Panels can slide to one or both sides
BRIO QUICK RUN 120
- max height - 3000mm
- max panel width - 75% of height
- max weight - 120kg
- **door thickness - min 32mm**
- **clearance: 3-5mm without soft close**
- **clearance: 7-13mm soft close**

single door kit comprises
- top track 120F
- 2 x hangers
- 2 x clip stops
- 1 x nylon saw cut guide

Brio


120 profile top track
41(w) x 30mm(h)


clip stop


hanger


saw cut guide

top hung sliding hardware - 180kg

☐ 7008
sold in 2, 3, 4 and 6m lengths

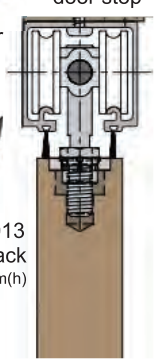
BRIO SINGLE RUN 180 TOP HUNG HEAVY DUTY SLIDING DOORS
- max height - 3000mm
- max width - 2500mm
- max weight - 180kg
- door thickness - 35 - 48mm

for internal and external use
for ease of operation,
suitable for a single door or for two doors on a bi-parting install
doors may slide in one or both directions
door kit comprises
- relevant length of top and bottom tracks
- 2 hangers
- 2 door stops
- 2 guides


☐ 7011
180 profile top track
47(w) x 45mm(h)


top hanger



door stop



Brio


☐ 7012 aluminium sleeve for poly track
25(w) x 23mm(h)


bearing guide


■ 7013 poly track
21(w) x 20mm(h)

NOT PART OF THE KIT


☐ 7005 single track 250kg bracket


☐ 7006 double track 250kg bracket


☐ 7025 adjustable architrave guide

cavity unit

■ 7950
wall cavity sliding unit

Frame construction will vary with size selected

bottom roller sliding hardware

max height - 2700mm
max width - 2400mm
max weight - 120kg
door thickness - min 40mm

☐ 7001 adjustable sliding bottom roller

■ 7000 black top track guide

Brio

■ 7003 sliding top glide
25 x 25 x 3mm

■ 7004 sliding bottom track
20(w) x 6.5mm(h)

☐ 7002 913DBA heavy duty double bogey adjustable roller

BRIO TIMBEROLL 200 HEAVY DUTY BOTTOM ROLLER SLIDING DOORS
- max height - 3000mm
- max width - 3000mm
- max weight - 200kg
- door thickness - 38 - 48mm

internal and external use.
suitable for any number of doors to cover the opening on single or multiple tracks.
doors may slide in one or both directions

NOTE : requires (2) two guides and (2) rollers per door. Top and bottom track comes in 6m lengths. Sold in 2,3,4 and 6m lengths only.

refer to item code in current hardware pricelist for costings

woodworkers **bifold hardware**

internal bifolds

☐ 7010
sold in 2, 3, 4 and 6m lengths


BRIO SHUTTER FOLD 25 BIFOLD DOORS
- max height : 2400mm
- max width : 900mm
- max weight : 25kg/door
- door thickness : min 35mm
- internal use only

suitable for up to 6 leaves pivoted to each side of an opening available in
- 2 door, 4 door + 6 door packs
- 2 door no channel pack


door stop


hanger


hinge
65 x 25mm


end pivot


end pivot no channel

bearing guide

NOT PART OF THE KIT

☐ 7014
100 profile top track
41(w) x 30mm(h)



■ 7013
poly track
21(w) x 20mm(h)

☐ 7012
aluminium sleeve for poly track
25(w) x 23mm(h)

398
pleated screen repair kit





how to restring brio pleated screen video

door overhead track bifold hardware


☐ 7011
180 profile top track
47(w) x 45mm(h)


■ 7013
poly track
21(w) x 20mm(h)

☐ 7012
aluminium sleeve for poly track
25(w) x 23mm(h)


☐ 7301S
pivot top


■ 7301G
pivot top


■ 7301B
pivot top


☐ 7302S
intermediate hanger top


■ 7302G
intermediate hanger top


■ 7302B
intermediate hanger top


☐ 7303S
pivot anchor bottom


■ 7303G
pivot anchor bottom


■ 7303B
pivot anchor bottom


☐ 7307S
jamb pivot bottom


■ 7307G
jamb pivot bottom


■ 7307B
jamb pivot bottom


☐ 7306S
end guide non morticed bottom


■ 7306G
end guide non morticed bottom


■ 7306B
end guide non morticed bottom


☐ 7305S
end hanger non morticed top


■ 7305G
end hanger non morticed top


■ 7305B
end hanger non morticed top


☐ 7304S
intermediate guide bottom


■ 7304G
intermediate guide bottom


■ 7304B
intermediate guide bottom


☐ 7120S
offset hinge


■ 7120G
offset hinge


■ 7120B
offset hinge


☐ 7121S
intermediate hinge


■ 7121G
intermediate hinge


■ 7121B
intermediate hinge


☐ 7122S
intermediate hinge handle


■ 7122G
intermediate hinge handle


■ 7122B
intermediate hinge handle

☐ 7123S
offset hinge handle

■ 7123G
offset hinge handle

■ 7123B
offset hinge handle

☐ 7124S
butt hinge handle

■ 7124G
butt hinge handle

NOTE : bifold hardware component designs may change at manufacturer's discretion

☐ 7401S
see pricelist for other options

BRIO 286 DUAL POINT LOCK SYSTEM
- panel thickness 38mm - 44mm
- max panel height 2.9m
- throw of bolt 25 x 5mm SS bar
- 45mm backset
- suits intermediate or end hanging doors
- locking or non locking

Suitable for internal locking only. External key entry options available.

silver only

locking

non locking